



PCT/PTO 02 DEC 2004 PCT/IB 03/02 582

INVESTOR IN PEOPLE

REC'D 17 JUL 2003


The Patent Office Concept House Cardiff Road Newport South Wales NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.



PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN COMPLIANCE WITH RULE 17.1(a) OR (b)

Signed

Tevens.

Dated

21 March 2003

atents Form 1/77 t 1977

THE PATENT OFFICE В

- 8 JUN 2002

Patent 00000

11JUN02 E724580-2 D02879 P01/7700 0.00-0213219.9

> The Patent Office Cardiff Road Newport Gwent NP10 8QQ

equest for grant of a N年世中ORT ee notes on the back of this form. You can

so get an explanatory leaflet from the Patent ffice to help you fill in this form)

Your reference

PHGB020089

Patent application number

(The Patent Office will fill in this part)

08 JUN 2002

0213219.9

Full name, address and postcode of the or of each applicant (underline all surnames)

KONINKLIJKE PHILIPS ELECTRONICS N.V. GROENEWOUDSEWEG 1 5621 BA EINDHOVEN THE NETHERLANDS

Patents ADP Number (if you know it)

07419294001

If the applicant is a corporate body, give the country/state of its incorporation

THE NETHERLANDS

Title of the invention

TEXT ENTRY FOR ELECTRONIC DEVICE

Name of your agent (if you have one) "Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

BRIAN T STEVENS Philips Intellectual Property and Standards Cross Oak Lane Redhill Surrey RH1 5HA

Patents ADP number (if you know it)

If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority Application number (if you know it)

Date of filing (day/month/year)

If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing (day/month/year)

Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if:

any applicant named in part 3 is not an inventor, or

- there is an inventor who is not named as an b) applicant, or
- any named applicant is a corporate body.

See note (d))

YES

Patents form 1/77

Patents Form 1/77

 Enter the number of sheets for any of the following items you are filing with this form.
 Do not count copies of the same document.



Continuation sheets of this form

Description	6	• •••	
Claims(s)	2		
Abstract	1	el	
Drawings	2	1 800	g-

If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right

to grant of a patent (Patents Form 7/77)

Request for preliminary examination and

search (Patents Form 9/77)

Request for substantive examination

(Patents Form 10/77)

Any other documents

(Please specify)

I/We request the grant of a patent on the basis of this application.

Signature H

Date 7-6-9002

!. Name and daytime telephone number of person to contact in the United Kingdom

01293 815294

(Brian T Stevens)

'arning

ter an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or mmunication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be formed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, ction 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the tent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same vention and either no direction prohibiting publication or communication has been given, or any such direction has been voked.

ites

If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

Write your answers in capital letters using black ink or you may type them.

If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

If you have answered "Yes" Patents Form 7/77 will need to be filed.

Once you have filled in the form you must remember to sign and date it.

For details of the fee and ways to pay please contact the Patent Office.

DESCRIPTION

5

10

15

20

25

30

TEXT ENTRY FOR ELECTRONIC DEVICE

The invention relates to text entry on an electronic device, particularly a mobile device, for example a mobile telephone or a personal digital assistant (PDA).

A large number of different methods for inputting text are currently used for electronic apparatus: using a numeric keypad, using a plug-in keyboard, character recognition using a touch screen and a virtual keyboard on a touch screen.

Text entry is an important feature of electronic devices, including mobile devices such as mobile telephones and PDA's, since the number of text messages being sent has increased remarkably over the past years. It is difficult to enter text using a conventional telephone keypad, and the difficulty increases enormously when the text needs to be entered in languages using a large number of characters, such as Japanese or Chinese.

Pen based text entry methods have been in common use on devices such as PDA's for some time. Text is manually entered and recognised by handwriting recognition software. Unfortunately, this approach is far from ideal. Handwriting recognition software is prone to errors, and often requires user training. Further, some handwriting software requires the user to adjust the way in which characters are entered. Handwriting recognition software is both script and language specific, and requires a fair amount of processing power that may not be available on mobile telephone devices. Further, any combination of graphics and text is very hard to deal with using this approach.

The use of a touch screen in combination with a pen allows the user to enter graphics directly. These graphics can contain handwritten text that may be sent to another mobile device. An example of such a device is disclosed in GB 2308523.

Unfortunately, this approach is still not suitable for a flexible text messaging system because the graphics file size is large compared to text alone and requires a significant amount of bandwidth. Further, pure graphics may not be effectively rescaled or organised to support the exchange of text messages between devices with different screen characteristics. Thus, although this approach may be suitable for sending graphics messages, it is not suitable for sending text messages.

5

10

15

20

25

30

According to the invention, there is provided an electronic device having a touch sensitive surface for inputting strokes forming at least one character; a memory; and code for interpreting inputted strokes and storing the strokes in the memory in a vector graphics format.

This system accordingly allows characters, especially text, to be entered and stored in a vector graphics format. As compared with bitmap graphics, vector graphics require vastly reduced storage requirements. The reduced storage requirements correspond to greatly reduced bandwidth requirements for exchanging entered text between devices.

Further, the use of vector graphics allows flexibility which permits the reproduction of characters entered on very different sizes and types of displays.

The electronic device is preferably a mobile device. As will be appreciated, some mobile devices have very small, low resolution displays whereas others have large high quality displays and it is useful to be able to exchange text messages between mobile devices with different types of displays.

A further significant benefit is that there is no need for character recognition software. This makes the invention highly suitable for script independent messaging systems and for the use of engineering language.

By storing entered text as vector graphics the stored text can be used as a basis for text recognition at a later stage either in the input device or an external device. The system offers the further benefit that displaying text written by the user makes the message much more personalised.

Further, it is very easy to combine text and graphics in a single message.

Preferably, the mobile device further comprises code for causing the mobile device to combine the strokes representing a plurality of characters and to transmit the message over a mobile network.

5

10

15

20

25

30

Preferably, the vector graphics format is the scaleable vector graphics format as published by the W3C Organisation. The scaleable vector graphics format used may be one of the scaler vector graphics implementation suitable for mobile communications, known as SVG basic and SVG tiny, or the general scaler vector graphics format. As will be appreciated, other vector graphics formats may also be used.

Preferably, the mobile device does not carry out any character recognition on the/or each character entered.

In another aspect, the invention relates to an input method for a mobile device, including: accepting on a touch sensitive surface at least one stroke forming at least one character; encoding the strokes entered in a vector graphics format; storing the encoded strokes.

The invention also relates to a computer program product containing code for causing a mobile device to carry out the steps of this method. The computer program product may be recorded on a data carrier, e.g. memory in the mobile device.

For a better understanding of the invention, an embodiment will now be described, purely by way of example, with reference to the accompanying drawings in which:

Figure 1 shows a mobile device according to an embodiment of the invention;

Figure 2 is a flow diagram showing the operation of the mobile device of Figure 1;

Figure 3 shows transmission of a message; and

Figure 4 shows a sample display as the user enters text on a mobile device in accordance with Figure 1.

A mobile device 10 has a housing 12 supporting a touch screen 14 and a small keypad 16. The housing 12 contains a printed circuit board 18 populated with a memory 20 and a processor 22. An aerial 24 is connected to the printed circuit board 18 to transmit signals. The skilled person will be aware of many different ways of implementing such a mobile telephone, and in particular a large number of different types of aerial, printed circuit board, processor, memory and keypad are available. Likewise, the skilled person will be aware of suitable touch screens, so these will not be described further.

5

10

15

20

25

30

The memory 20 contains code 26 for causing the processor 22 to control the mobile telephone 10 to carry out the steps of a method as will be described below. The memory 20 may also contain data items 28 corresponding to entered characters.

Referring to Figure 2, in use the user enters text by entering at least one stroke using either a finger or a pen 30 on the touch sensitive screen 14. The device accepts 40 the entered strokes.

For example, if the user were to enter an "A" character, the device would store three strokes, the first being from the bottom left corner to the top middle, the second being from the top middle to the bottom right corner and then a horizontal line in the middle of the display. The format of the recorded strokes may vary depending on the application. Features such as the start and end point of the line, the curvature of the line, and the jaggedness may also be stored.

After each character is input it is encoded 42 in a suitable vector graphics format which allows it to be resized easily. The character is stored 44 in memory 20. By default it may be automatically shrunk and displayed 46 on the touch screen 14, placed to the right of the previous character as for normal text input. This enables a text message to be built up from a number of strokes.

The text message is displayed as a sequence of characters of substantially equal size even though the characters are stored as scaler vector graphics objects and not as characters themselves.

The device then accepts 48 a user input to signify a complete vector graphics message. One overall vector graphic is then created 50 from the individual components. This operation is trivial in most common vector graphics languages.

5

10

15

20

25

30

The user is then allowed the option of adding 52 general vector graphics components to the whole message, for example by underlining phrases, or by drawing an image over the whole message and similar. For example, the user may draw a heart over the whole message.

The message 58 is then encoded 54 into an encoding format suitable for the transport used, and transmitted 56. The information transmitted includes a header 60 and a vector graphics message 62 (Fig. 3).

The message may be received and displayed on the display 72 of a receiving mobile terminal 70. Because of the nature of vector graphics, resizing to suit the size of the new display is easy and does not require excessive processing power in spite of the use of graphic characters rather than conventional characters.

Figure 4 illustrates a possible screen display. The user enters each character consecutively in the dotted rectangle 74 using the stylus 30. The user may press the arrow on the right 76 to insert a space, or the arrow on the left 78 to delete the previous character. After each entry, each character 80 appears separately in the central box 82, and when the complete message is finished, pressing the envelope icon 84 sends the message. A sound may be provided to indicate whether or not this is successful. No attempt is made to recognise the character entered. Instead, the graphics are stored as vector graphics and sent in this format to the addressee.

The invention is applicable to any electronic device, especially a mobile device, such as a mobile telephone, PDA, communication system or for note taking etc.

. : . .

Although the method disclosed above avoids the need for character recognition, this may be carried out if required either in the transmitter or the receiver in order to carry out other functions or tasks that require interpretation of the input characters.

The terms "character" and "text" are not limited to language characters. They may include emotions, faces, graphic symbols and the like.

5

10

15

20

25

500

The skilled person will appreciate that the precise order of character entry described above may be varied. For example, individual graphics may be entered at any time, rather than the end of the message, or the entered characters may be displayed in other ways.

In the described embodiment the code 26 is stored in memory 20 acting as a data carrier. The skilled person will be aware of many suitable data carriers for code, including floppy, hard and optical discs, CDs, DVDs, flash memory cards, and many more.

From reading the present disclosure, other variations and modifications will be apparent to persons skilled in the art. Such variations and modifications may involve equivalent and other features which are already known in the design, manufacture and use of text input devices and which may be used in addition to or instead of features described herein. Although claims have been formulated in this application to particular combinations of features, it should be understood that the scope of disclosure also includes any novel feature or any novel combination of features disclosed herein either explicitly or implicitly or any generalisation thereof, whether or not it mitigates any or all of the same technical problems as does the present invention. The applicants hereby give notice that new claims may be formulated to any such features and/or combinations of such features during the prosecution of the present application or of any further applications derived therefrom.

CLAIMS:

1. An electronic device, comprising:

a touch sensitive surface for inputting strokes forming at least one character;

a memory; and

code for interpreting inputted strokes and storing the strokes in the memory in a vector graphics format.

10

5

2. An electronic device according to claim 1 further comprising an aerial and code for causing the electronic device to combine strokes representing a plurality of characters and to transmit the combined strokes as a message via the aerial over a mobile network.

15

25

- 3. An electronic device according to claim 1 or 2 wherein the vector graphics format is the scalable vector graphics format.
- 4. An electronic device according to any preceding claim wherein the code records strokes representing one or more characters in the memory without carrying out character recognition on the or each character.
 - An input method for an electronic device, including:
 accepting on a touch sensitive surface at least one stroke forming at least one character;

encoding the strokes entered in a vector graphics format; storing the encoded strokes.

6. A method according to claim 5 further comprising

combining the stored encoded strokes to make up a complete message in vector graphics format;

encoding the complete message for transmission; and

transmitting the complete message over a mobile telephone network.

- 7. A method according to claim 5 or 6 wherein the vector graphics format is the scalable vector graphics format.
- 8. A method according to claim 5, 6 or 7 wherein the strokes are recorded in memory without carrying out character recognition on the or each character.
- 9. A computer program product containing code for causing an electronic device to carry out the steps of a method according to any of claims 5 to 8.
 - 10. A computer program product recorded on a data carrier containing code for causing a mobile device to carry out the steps of:

accepting on a touch sensitive surface at least one stroke of text made up of at least one character;

encoding the strokes entered in a vector graphics format; storing the encoded strokes.

20

15

5

ABSTRACT

TEXT ENTRY FOR ELECTRONIC DEVICE


An electronic device has a touch sensitive surface (14) for entering text.

The text is stored in memory (20) in a vector graphics format, preferably without carrying out character recognition.

[Figure 1]

10

5

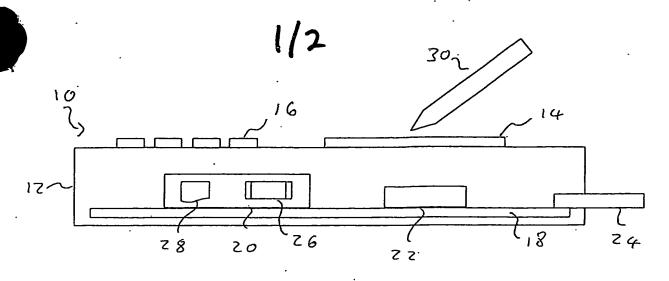

F.g. 1 Accept Char 40 -Encode 47-Store Display **N** · End Combine Chars 50 -Add graphics Fig. Z Encode 547 56-Transmit

PH98020089.

